

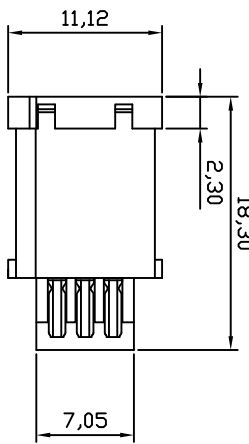
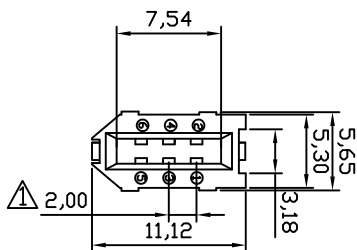
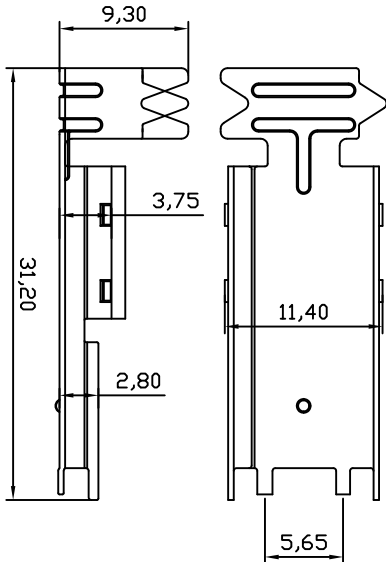
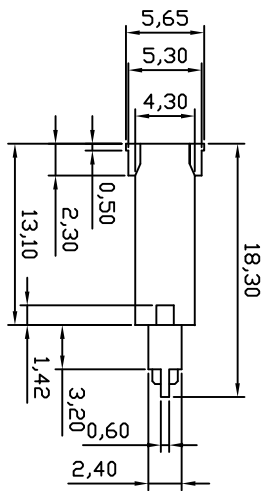

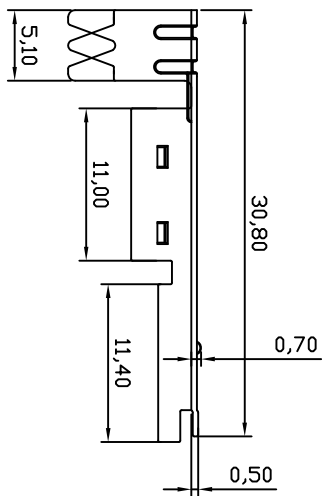
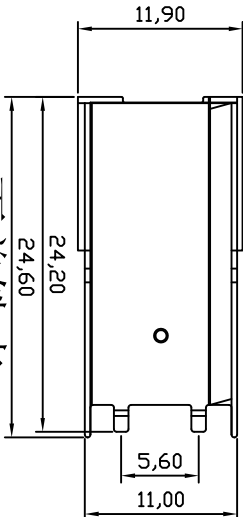


| 变更标记 | 日期         | 变更内容   | 签名 | 核准 |
|------|------------|--------|----|----|
|      | 2013.01.28 | 增加尺寸管理 | 刘峰 |    |



上盖铁壳

主体

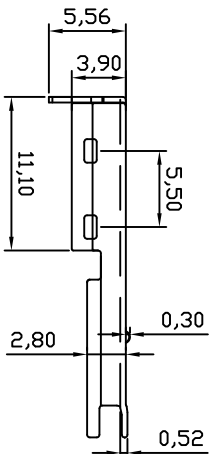

下盖铁壳

Material & finish  
SHELL:  
steel  
Zinc plated, Tin plated  
or Nickel plated steel  
PIN CONTACT:  
brass Gold Plated  
INSULATOR:  
PBT UL-94-V0  
NUMBER OF CONTACT:  
09 15 25 37  
CURRENT RATING:  
3Amp  
INSULATOR RESISTANCE:  
1000M MIN.(at 500V DC)  
TEMPERATURE:  
-55°C to +105°C

COLOUR  
B:Blue K:Black W:White 2:661G  
blue 3:235C Red 4:322C green  
6:1310YellW

IEI-06 P x V x B x 0 0 0

PLATING  
A:Gold N:Nickel T:Tin S:Zinc D:CU/ZNSN  
Contact Finish  
A:Gold Flash C:Gold Flash3U" D:Gold Flash5U" E:Gold Flash15U"  
F:Gold Flash30U" G:Gold T:Tin

|                                                    |    |    |      |                 |            |
|----------------------------------------------------|----|----|------|-----------------|------------|
|                                                    |    |    |      |                 |            |
| 东莞扬顺五金电子有限公司                                       |    |    |      |                 |            |
| Dong Guan City Yang Shun Hardware Electron Co.,Ltd |    |    |      |                 |            |
| 未注公差                                               | 设计 | 审核 | 品名规格 | 1394 6P         | 公头三件式      |
| X. ±0.30                                           |    |    | 料号   | IEI-06PxxxBx000 | 型号         |
| XX ±0.20                                           |    |    | 日期   | 2012.09.03      | 图号         |
| XXX ±0.10                                          |    |    | 单位   | mm              | YS-11-0067 |
| XXX ±0.05                                          |    |    | 比例   | 1:1             | 版次         |
| X° ±2° XX° ±1°                                     |    |    |      |                 | A/1        |