
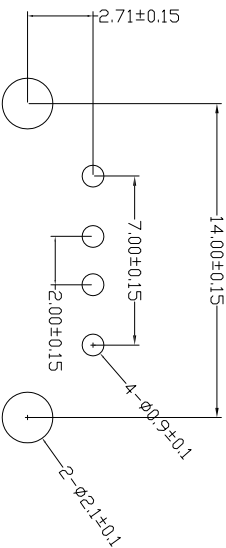
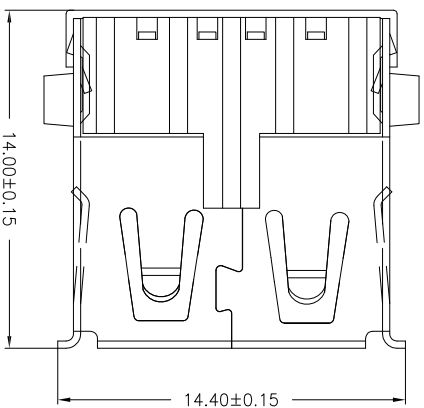


变更标记	日期	变更内容	签名	核准

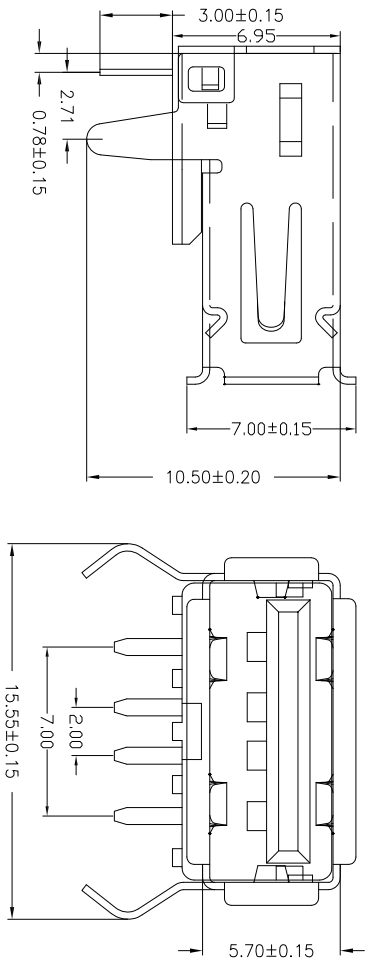

RBCOMMENDBD P.C.B PATTBRN LAYD UT

NOTES:

Housing: Thermoplastics,UL94V-0
Contact: Copper Alloy
Shell: Copper Alloy/Steel
Voltage Current Rating:1.5 AMP. 30V AC
Insulation Resistance:1000MΩ Min.
Contact Resistance: 30 MΩ Max.
Dielectric Withstanding Voltage:500W AC
Temperature Range:-35°C to +85°C
Insulator color: Black/White
Plastic material:PBT/LCP/Others
Shell finish: Sn/Zn/Cu
Mechanical:
Mating Force:3.5KG MAX
Umating Force:0.7 KG MIN.
Contact finish:

- 01:Selective Gold Flash
02:Selective Gold 3U”
03:Selective Gold 5U”
04:Selective Gold 15U”
05:Selective Gold 30U”

备注：侧弹分为外弹与内弹

东莞扬顺五金电子有限公司 Dong Guan City Yang Shun Hardware Electron Co.,Ltd				
未注公差		设计	品名规格	
X. ±0.30		审核	AF90度外扣弯脚有卷边+短弹片 无磁	
XX ±0.20		核准	料号	型号
XXX ±0.10		单位	日期	图号
XXXX ±0.05		mm		
X° ±2° XX' ±1°		比例	1:1	版次
				A/0