
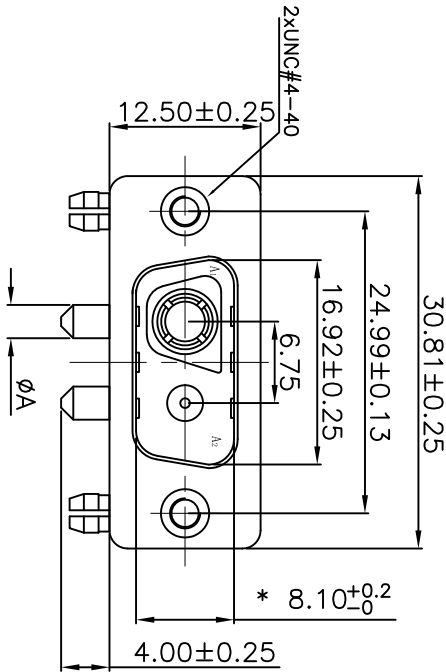


| 变更标记 | 日期 | 变更内容 | 签名 | 核准 |
|------|----|------|----|----|
|      |    |      |    |    |

| POXX | 电流强度 (A) | φA   | PCB φB |
|------|----------|------|--------|
| 1    | 10       | 1.7  | 2.0    |
| 2    | 20       | 2.75 | 3.0    |
| 3    | 30       | 3.3  | 3.6    |
| 4    | 40       | 3.8  | 4.10   |



MATERIALS AND FINISH

SHELL : BRASS MATERIAL, CU/ZN/SM FINISHED  
CONNECTOR INSULATOR : PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED  
BRACKET MATERIAL: BRASS: NI FINISHED  
HIGH POWER CONTACT MATERIAL: PHOSPHOR BRONZE;/BRASS 30U~50u" GOLD PLATED

ELECTRICAL CHARACTERISTICS


HIGH POWER CONTACT CURRENT RATING :10,20,30,OR 40 AMPS  
HIGH POWER CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.  
DIELECTRIC WITHSTANDING VOLTAGE :1000 V AC FOR 1 MINUTE  
INSULATION RESISTANCE : 5000 MEGAOHMS MIN.  
TEMPERATURE RATING : -55°C ~ +125°C

DW-2 V 2 X X 7 X 0 D 0

COLOUR  
B: Blue K: Black W: White

Contact Finish  
A: Gold Flash C: Gold Flash30U" D: Gold Flash50U" E: Gold Flash150U"  
F: Gold Flash30U" G: Gold T: Tin

CURRENT:  
A: 5 B: 10 C: 40 D: 20 E: 30

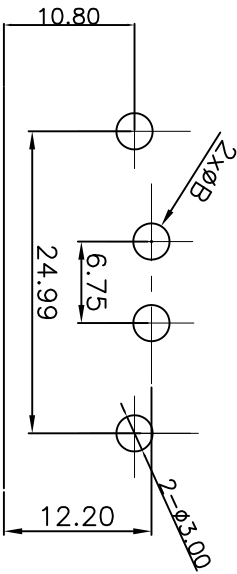

PCB LAYOUT



东莞扬顺五金电子有限公司  
Dong Guan City Yang Shun Hardware Electron Co.,Ltd

| 未注公差   |          | 设计 | 刘峰 | 品名规格 |               | 2V2 公头 90度插板式 带支架10.8 无磁 |           |     |
|--------|----------|----|----|------|---------------|--------------------------|-----------|-----|
| X.     | ±0.30    | 审核 |    | 料号   | DW-2V2x0700D0 | 型号                       |           |     |
| X.X    | ±0.20    | 核准 |    | 单位   | mm            | 日期                       | 2015-7-20 | 图号  |
| X.XX   | ±0.10    |    |    |      |               | 比例                       | 1:1       | 版次  |
| X.XXX  | ±0.05    |    |    |      |               |                          |           | A/0 |
| X° ±2° | X'X' ±1° |    |    |      |               |                          |           |     |