

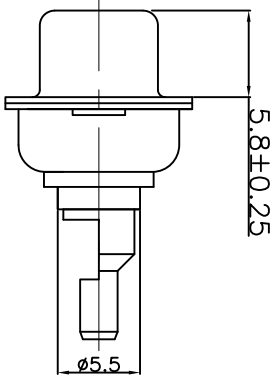


变更标记	日期	变更内容	签名	核准

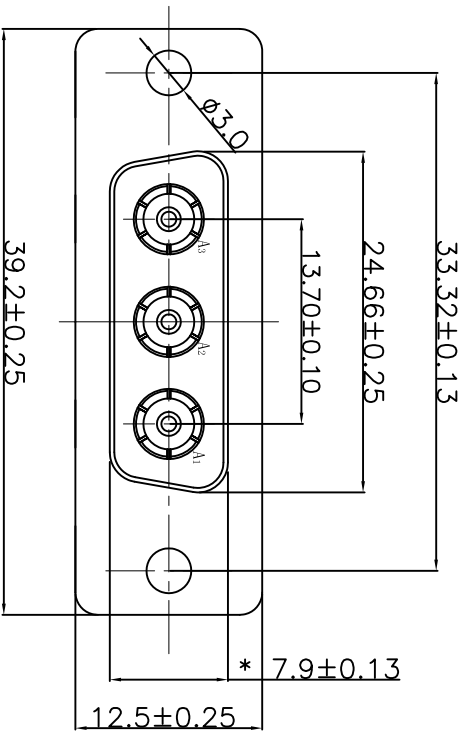

TUBE

MATERIALS AND FINISH

SHELL : STEEL OR BRASS MATERIAL, Tin/Ni OR Au FINISHED

CONNECTOR INSULATOR : PBT THERMOPLASTIC,30% GLASS FILLED, UL 94V-0 RATED

HIGH FREQUENCY CONTACT MATERIAL: PHOSPHOR BRONZE, 30U~50u " GOLD PLATED

ELECTRICAL CHARACTERISTICS


HIGH FREQUENCY CONTACT CURRENT RATING :50 OHM.

HIGH FREQUENCY CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC FOR 1 MINUTE

INSULATION RESISTANCE : 5000 MEGAOHMS MIN.

TEMPERATURE RATING : -55°C ~ +125°C

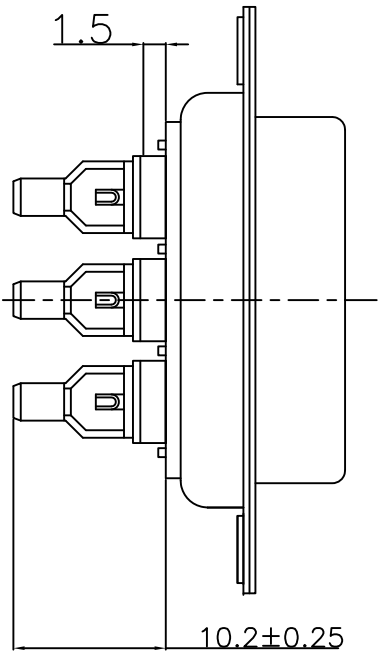

DW-3 F 3 X X C 0 A A 0

COLOUR

B: Blue K: Black W: White

Contact Finish

A: Gold Flash5U" C: Gold Flash3U"

D: Gold Flash5U" E: Gold Flash15U"

F: Gold Flash30U" G: Gold T: Tin



东莞扬顺五金电子有限公司
Dong Guan City Yang Shun Hardware Electron Co.,Ltd

未注公差		设计	刘峰	品名规格	3W3母头 同轴焊线式 50欧	
X.	±0.30	审核				
XX	±0.20	核准				
XXX	±0.10					
XXX	±0.05	单位	mm	料号	日期	型号
X° ±2°	X.X° ±1°			比例	1:1	图号
						版次
						A/0