
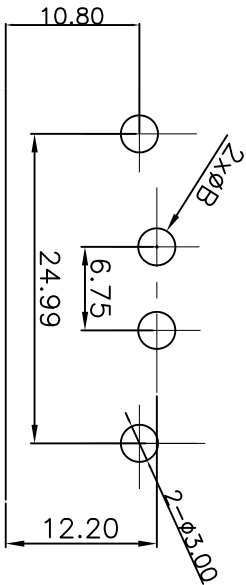
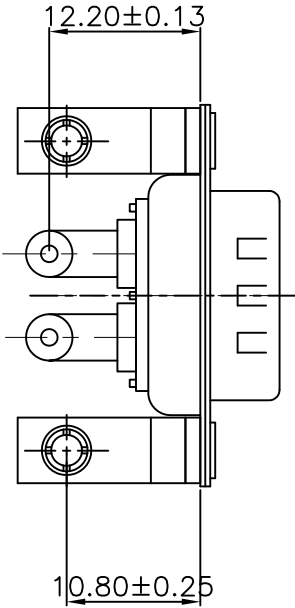
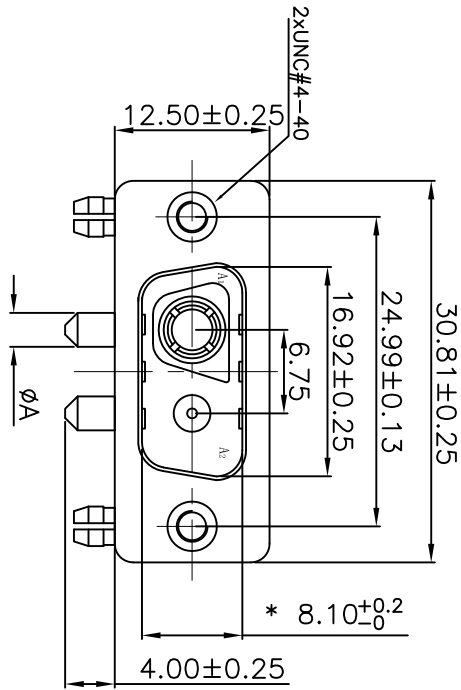


变更标记	日期	变更内容	签名	核准

P0(X)	电流强度 (A)	φA	PCB φB
1	10	1.7	2.0
2	20	2.75	3.0
3	30	3.3	3.6
4	40	3.8	4.10



PCB LAYOUT

MATERIALS AND FINISH

SHELL : STEEL OR BRASS MATERIAL, Tin/Ni OR Au FINISHED
CONNECTOR INSULATOR : PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED
BRACKET MATERIAL: BRASS, NI FINISHED
HIGH POWER CONTACT MATERIAL: PHOSPHOR BRONZE;/BRASS 30"~50u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING :10,20,30,OR 40 AMPS
HIGH POWER CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE :1000 V AC FOR 1 MINUTE
INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
TEMPERATURE RATING : -55°C ~ +125°C

DW-2 V 2 X 0 C 0 0 D 0

COLOUR
B : Blue K : Black W : White

 东莞扬顺五金电子有限公司 Dong Guan City Yang Shun Hardware Electron Co.,L.td					
未注公差		设计	刘峰	品名规格	
X. ±0.30		审核		2V2 公头 90度插板式 带支架10.8	
X.X ±0.20		核准		料号	DW-2V2X0C00D0
X.XX ±0.10		单位	mm	日期	2015-7-20
X.XXX ±0.05				图号	
X° ±2° XX° ±1°				比例	1:1
				版次	A/0