
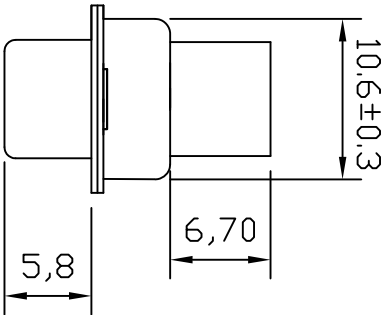


变更标记	日期	变更内容	签名	核准

Material & finish
SHELL:
steel
Zinc plated,Tin plated
or Nickel plated steel
PIN CONTACT:
Phosphor bronze or brass
Gold Plated
INSULATOR:
PBT & Glass—fibre reinforced
UL-94-V0
NUMBER OF CONTACT:
09 15 25 37
CURRENT RATING:
3Amp
INSULATOR RESISTANCE:
1000Mn MIN.(at 500V DC)
TEMPERATURE:
-55°C to +105°C

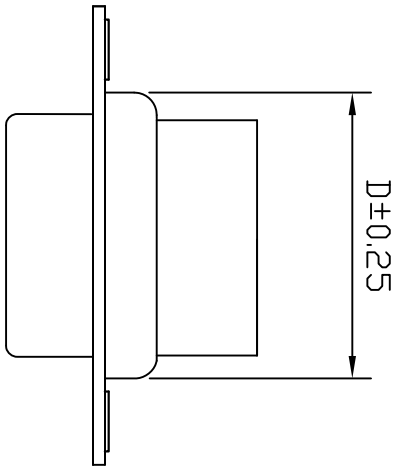


	A	B	C	D	E
15	16.25	25.0	30.8	19.0	2.29
26	24.8	33.3	39.2	27.7	2.29
44	38.3	47.0	53.0	41.0	2.29
62	54.8	63.5	69.4	57.3	2.41

HH-x S x x 0 x x A 0 0

Pin:15 26 44 62

COLOUR
B:Blue K:Black W:White 2.661C
blue 3:235C Red 4:322C green
6:131CYellow

SHELL PLATING
A:Gold B:Front Gold and back Tin C:Front Nickel and
Back TIN N:Nickel T:Tin 5:Zinc D:CU/ZN/5N

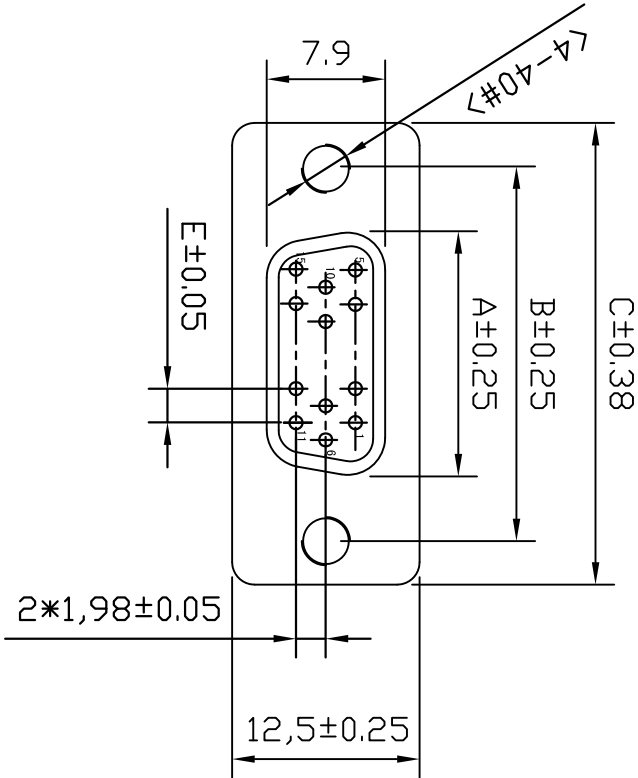


东莞扬顺五金电子有限公司
Dong Guan City Yang Shun Hardware Electron Co.,Ltd

未注公差		设计	刘锋	品名规格		D-SUB HH-CRIMP 传统母	
X.	±0.30	审核		料号	DH-xSxx0xxA00	型号	
XX	±0.20	核准		日期	2012. 11. 08	图号	YS-11-0087
XXX	±0.10	单位	mm	比例	1:1	版次	A/0
XXX	±0.05						
X° ±2°	X.X° ±1°						