

| 变更标记 | 日期 | 变更内容 | 签名 | 核准 |
|------|----|------|----|----|
|      |    |      |    |    |

Material & finish

SHELL:

steel

Zinc plated,Tin ploted

or Nickel plated steel

PIN CONTACT:

Phosphor bronze or brass

Gold Plated

INSULATOR:

PBT & Glass-fibre reinforced

UL-94-V0

NUMBER OF CONTACT:

09 15 25 37

CURRENT RATING:



3Amp

INSULATOR RESISTANCE:

1000Mn MIN.(at 500V DC)

TEMPERATURE:

-55°C to +105°C

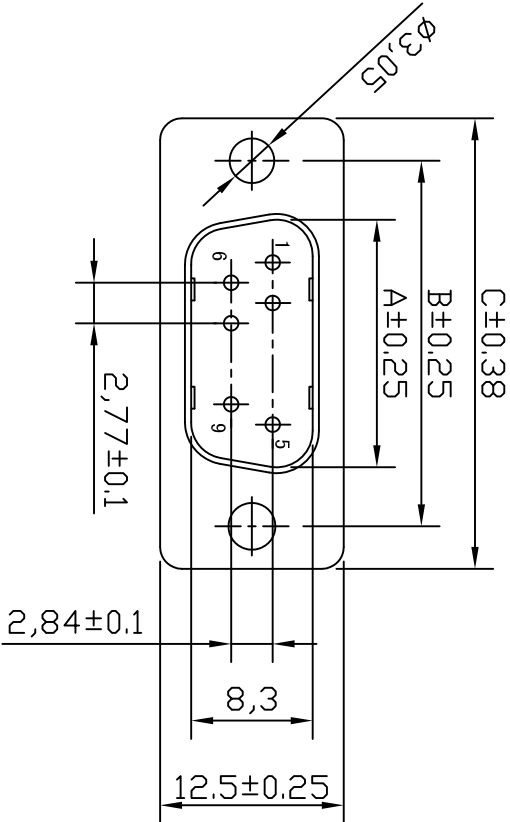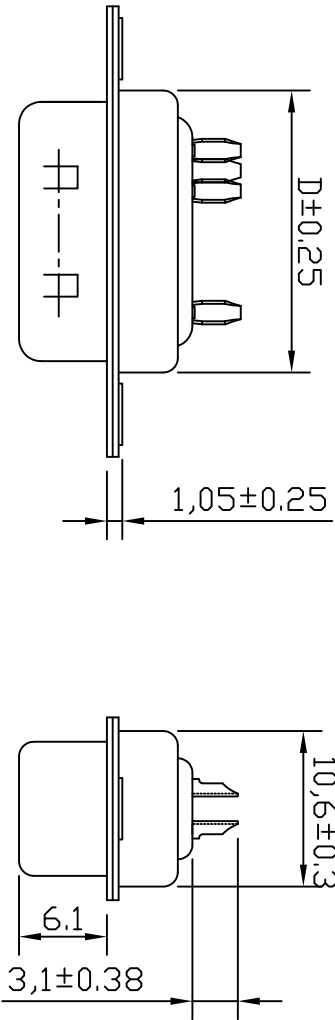

| A  | B     | C    | D    |
|----|-------|------|------|
| 09 | 16.9  | 25.0 | 30.8 |
| 15 | 25.35 | 33.3 | 39.2 |
| 25 | 39.0  | 47.0 | 53.0 |
| 37 | 55.4  | 63.5 | 69.4 |

DB-X M X V X X A 0 0

Pin:09 15 25 37

COLOUR

B:Blue K:Black W:White 2:661C  
blue 3:235C Red 4:322C green  
6:131CYellow

SHELL PLATING

A:Gold B:Front Gold and back Tin C:Front Nickel and  
Back TIN N:Nickel T:Tin 5:Zinc D:CU/ZN/SN

Contact Finish

A:Gold Flash 30U" D:Gold Flash5U" E:Gold Flash15U"  
F:Gold Flash30U" G:Gold T:Tin



东莞扬顺五金电子有限公司  
Dong Guan City Yang Shun Hardware Electron Co.,L.td

| 未注公差    |          | 设计 | 品名规格        | D-SUB-一体公母线式 |               |     |
|---------|----------|----|-------------|--------------|---------------|-----|
| X.      | ±0.30    | 审核 | luoyongqian | 料号           | DB-XMxVxxxA00 | 型号  |
| XX      | ±0.20    | 核准 | luoyongqian | 日期           | 2012-09-03    | 图号  |
| XXX     | ±0.10    | 单位 | mm          | 比例           | 1:1           | 版次  |
| X.XXX   | ±0.05    |    |             |              |               | A/0 |
| X.° ±2° | X.X° ±1° |    |             |              |               |     |