



变更标记	日期	变更内容	签名	核准

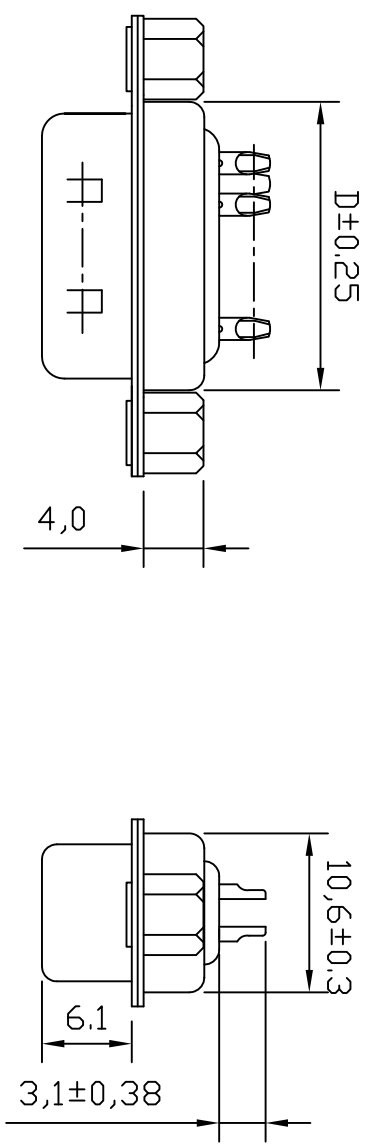

Material & finish
SHELL:
steel
Zinc plated,Tin plated
or Nickel plated steel
PIN CONTACT:
Phosphor bronze or brass
Gold Plated
INSULATOR:
PBT & Glass-fibre reinforced
UL-94-V0
NUMBER OF CONTACT:
09 15 25 37
CURRENT RATING:
3Amp
INSULATOR RESISTANCE:
1000Mn MIN.(at 500V DC)
TEMPERATURE:
-55°C to +105°C

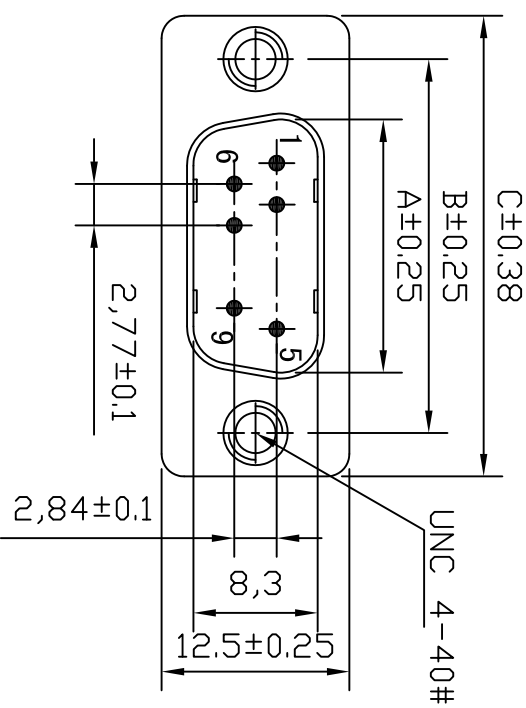

	A	B	C	D
09	16.9	25.0	30.8	19.0
15	25.35	33.3	39.2	27.7
25	39.0	47.0	53.0	41.0
37	55.4	63.5	69.4	57.3

DB-X PxxxXB00

Pin: 09 15 25 37

COLOUR
B: Blue K: Black W: White 2: 661C
blue 3: 235C Red 4: 322C green
6: 131C Yellow

SHELL PLATING
A: Gold B: Front Gold and back Tin C: Front Nickel and
Back TIN N: Nickel T: Tin 5: Zinc D: CU/ZN/SN

Contact Finish
A: Gold Flash C: Gold Flash3U D: Gold Flash5U E: Gold Flash15U
F: Gold Flash30U G: Gold T: Tin



东莞扬顺五金电子有限公司
Dong Guan City Yang Shun Hardware Electron Co.,Ltd

未注公差	设计	品名规格	比例
X ±0.30	审核	D-SUB传统公后卿4.0六角通孔螺母焊线式	1:1
X.X ±0.20	核准	料号 DB-xPxxxxxB00	型号 D-SUB 9-37Pin
X.XX ±0.10	单位	日期 2012.09.03	图号 YS-11-0014
X.XXX ±0.05	mm	比例 1:1	版次 A/0
X° ±2° X.X° ±1°	mm	比例 1:1	版次 A/0